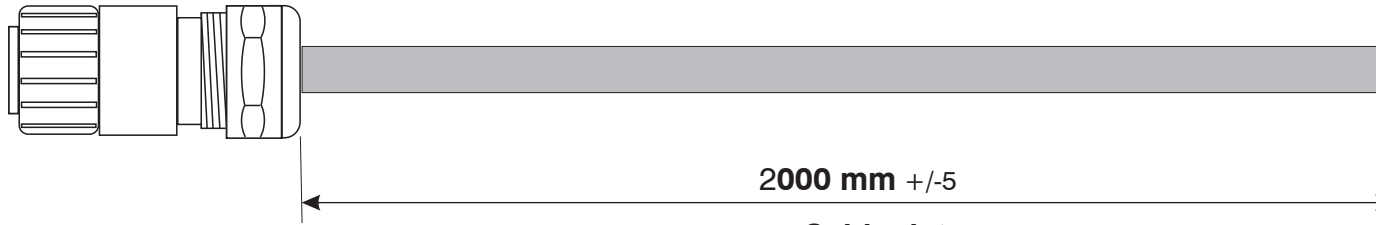


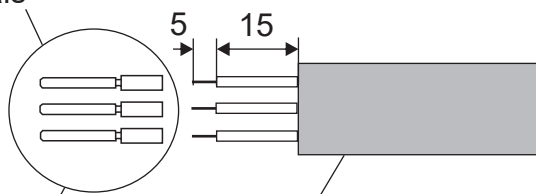

**J1**

2000 mm +/-5

**Cable data:**

- 2D robot cable. Must withstand permanent movement/bending
- JVL Part number: WH0005-N4x0.75-SC
- Bending diameter min. 10cm.
- Screened
- Resistant to oil
- Outside color = Black
- Outside diameter = 7 - 9 mm
- UL Recognized
- Wire dimension 0.75mm<sup>2</sup> (x4)
- Cablerating : 600V
- RoHS compatible

Crimp terminals

**J1**

Ø7-9mm

**J1 Connector = Hummel M16 male** (see also [www.hummel-group.com](http://www.hummel-group.com))

Housing: JVL part no. WG0230 / Hummel part no. 7.810.400.000

Crimp contact (male): JVL part no. WG0228 / Hummel part no. 7.010.981.601

Nylon insert: JVL part no. WG0226 / Hummel part no. 7.003.943.101

Settings for crimp tool U00254 PEW 8.72 with 0.75 mm<sup>2</sup>:Locator 04, Position 6 / Crimp depth: 0.90 mm

J1 Pins	Wire color		Function
A	White	BO	Bus out 325VDC
B	Yellow	PD	Power Dump output
C	Brown	CM	Common
(Earth)	Green/Yellow	PE	(Earth)

LT0170-10GB

JVL Industri Elektronik A/S  
 Bregnerødvej 127 • DK-3460 Birkerød  
 Tel: +45 4582 4440  
 Fax: +45 4582 5550

**WP0102**  
 Brake cable  
 2M with M16 straight

Version - 1.1

Date: 18-08-16

Approved by:

Drawn by:

-

PCR/JVA

